

Performance

	ENGLISH	SI	
Sensitivity ($\pm 10\%$)	26 pC/g	2.6 pC/(m/s ²)	[2]
Frequency Range (+10%)	300 kcpm	5 kHz	[3]
Frequency Range (+3 dB)	600 kcpm	10 kHz	
Resonant Frequency	1800 kcpm	30 kHz	[1]
Non-Linearity	$\pm 1\%$	$\pm 1\%$	[4]
Transverse Sensitivity	$\leq 5\%$	$\leq 5\%$	

Environmental


Overload Limit (Shock)	5000 g pk	49,050 m/s ² pk	
Temperature Range (Operating)	-65 to +500 °F	-54 to +260 °C	
Temperature Response	See Graph	See Graph	[1]
Enclosure Rating	IP68	IP68	

Electrical

Capacitance	1500 pF	1500 pF	[1]
Insulation Resistance (at room temp)	$\geq 0.5 \times 10^{12}$ ohm	$\geq 0.5 \times 10^{12}$ ohm	[1]
Insulation Resistance (at 500 °F)	$> 10^9$ ohm	$> 10^9$ ohm	[1]
Electrical Isolation (Base)	$> 10^8$ ohm	$> 10^8$ ohm	[1]
Output Polarity	Negative	Negative	

Physical

Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Size (Hex x Height)	7/8 in x 2.12 in	22.2 mm x 53.8 mm	
Weight	2.95 oz	83.6 gm	[1]
Electrical Connector	2-Pin MIL-C-5015	2-Pin MIL-C-5015	
Electrical Connection Position	Top	Top	
Mounting Thread	1/4-28 UNF	No Metric Equivalent	
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 N-m	

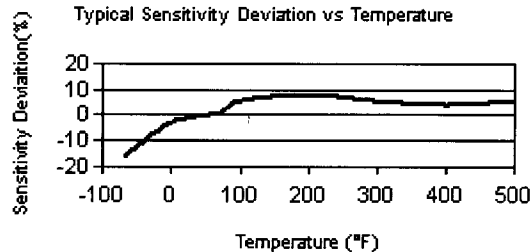

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB Group, Inc.

OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

M - Metric Mount

Supplied Accessory : Model M081A61 Mounting Stud 1/4-28 to M6 X 1 replaces Model 081A40

NOTES:

- [1] Typical value.
[2] Conversion Factor 1g = 9.81 m/s².
[3] 1Hz = 60 cpm (cycles per minute).
[4] Zero-based, least-squares, straight line method.

SUPPLIED ACCESSORIES:

Model 081A40 Mounting Stud
Model ICS-1 NIST-traceable single-axis amplitude response calibration from 600 cpm (10 Hz) to upper 5% frequency

Entered: <i>JR</i>	Engineer: <i>JR</i>	Sales: <i>JR</i>	Approved: <i>UF</i>	Spec Number:
Date: 5-17-06	Date: 4/11/06	Date: 4/20/06	Date: 7/6/06	13075

IMI SENSORS
A PCB PIEZOTRONICS DIV.
3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464
Fax: 716-684-3823
E-Mail: imi@pcb.com