

Model Number
602D11

LOW-COST INDUSTRIAL ICP® ACCELEROMETER

Revision C
ECN #: 25657

Performance	ENGLISH	SI	
Sensitivity (±10 %)	100 mV/g	10.2 mV/(m/s ²)	[2]
Measurement Range	±50 g	±490 m/s ²	
Frequency Range (±3 dB)	30 to 480000 cpm	0.5 to 8000 Hz	[3]
Resonant Frequency	1500 kcpm	25 kHz	[1]
Broadband Resolution (1 to 10000 Hz)	350 µg	3434 µm/sec ²	[1]
Non-Linearity	±1 %	±1 %	[4]
Transverse Sensitivity	≤7 %	≤7 %	
Environmental			
Overload Limit (Shock)	5000 g pk	49050 m/s ² pk	
Temperature Range	-65 to +250 °F	-54 to +121 °C	
Temperature Response	See Graph	See Graph	
Enclosure Rating	IP68	IP68	
Electrical			
Settling Time (within 1% of bias)	≤2.0 sec	≤2.0 sec	
Discharge Time Constant	≥0.3 sec	≥0.3 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<150 ohm	<150 ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise (10 Hz)	8.0 µg/√Hz	78.5 (µm/sec ² /√Hz)	[1]
Spectral Noise (100 Hz)	5 µg/√Hz	49.1 (µm/sec ² /√Hz)	[1]
Spectral Noise (1 kHz)	4 µg/√Hz	39.2 (µm/sec ² /√Hz)	[1]
Electrical Isolation (Case)	>10 ⁸ ohm	>10 ⁸ ohm	
Physical			
Size (Length x Width x Height)	3.70 in x 0.74 in x 0.845 in	94 mm x 18.8 mm x 21.5 mm	
Weight (without cable)	2.61 oz	74.0 gm	
Mounting Thread	1/4-28 Male	No Metric Equivalent	[5]
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 N-m	
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	Molded Integral Cable	Molded Integral Cable	
Electrical Connection Position	Side	Side	
Cable Length	10 ft	3.0 m	
Cable Type	Polyurethane	Polyurethane	[6]

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

EX - Hazardous Area Approval- contact factory for specific approvals

Approval	Exia IIC T4, AExia IIC, T4	Exia IIC T4, AExia IIC, T4
Hazardous Area Approval	EEx nL IIC T4, -40°C≤Ta≤121°C, II 3 G	EEx nL IIC T4, -40°C≤Ta≤121°C, II 3 G
Hazardous Area Approval	EEx nL IIC T4, -40°C≤Ta≤121°C, II 1 G	EEx nL IIC T4, -40°C≤Ta≤121°C, II 1 G
Hazardous Area Approval	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I
Hazardous Area Approval	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4

M - Metric Mount
Supplied Accessory: Model M081A97 Mounting bolt, M6x1 (for Series M602C accelerometers) replaces Model 081A97

TO - Temperature Output

Parameter	+36 to +250 °F	+2 to +121 °C
Temperature Output Range	+36 to +250 °F	+2 to +121 °C
Temperature Scale Factor	5.56 mV/°F + 32	(+10 mV/°C)
Electrical Connector	Molded Integral Cable	Molded Integral Cable
Electrical Connections (Green)	Ground	Ground
Electrical Connections (Black)	Ground	Ground
Electrical Connections (White)	Temperature Output	Temperature Output
Electrical Connections (Red)	Acceleration Output	Acceleration Output


Notes

- [1] Typical.
- [2] Conversion Factor 1g = 9.81 m/s².
- [3] The high frequency tolerance is accurate within ±10% of the specified frequency.
- [4] Zero-based, least-squares, straight line method.
- [5] 1/4-28 has no equivalent in S.I. units.
- [6] Twisted shielded pair.
- [7] See PCB Declaration of Conformance PS023 or PS060 for details.

Supplied Accessories

081A97 Thru bolt 1/4-28 (1)
ICS-2 NIST-traceable single-axis single-point amplitude response calibration at 6000 cpm (100 Hz) (1)

Entered: LLH	Engineer: JEC	Sales: NJF	Approved: LLH	Spec Number:
Date: 01/29/2007	Date: 01/31/2007	Date: 01/31/2007	Date: 02/02/2007	30085

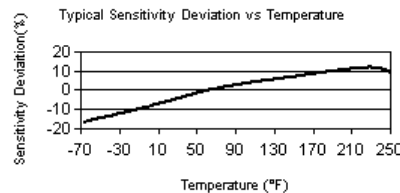

3425 Walden Avenue
Depew, NY 14043
UNITED STATES
Phone: 716-684-0003

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.

Fax: 716-684-3823

E-mail: imi@pcb.com

Web site: www.imi-sensors.com