

	ENGLISH	SI	
Performance			
Sensitivity (±10 %)	25 mV/g	2.6 mV/(m/s ²)	
Measurement Range	±200 g pk	±1960 m/s ² pk	
Frequency Range (±5 %)	1 to 5000 Hz	1 to 5000 Hz	
Frequency Range (±10 %)	0.5 to 6500 Hz	0.5 to 6500 Hz	
Resonant Frequency	≥25 kHz	≥25 kHz	
Broadband Resolution (1 to 10000 Hz)	0.0002 g rms	0.002 m/s ² rms	[1]
Non-Linearity	≤1 %	≤1 %	[4]
Transverse Sensitivity	≤5 %	≤5 %	
Environmental			
Overload Limit (Shock)	±7000 g pk	±68600 m/s ² pk	
Temperature Range (Operating)	-65 to +250 °F	-54 to +121 °C	[3]
Temperature Response	See Graph	See Graph	
Base Strain Sensitivity	0.001 g/με	0.01 (m/s ²)/με	[1]
Electrical			
Excitation Voltage	20 to 30 VDC	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤100 ohm	≤100 ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	0.5 to 2.0 sec	0.5 to 2.0 sec	
Settling Time (within 10% of bias)	<5 sec	<5 sec	
Spectral Noise (1 Hz)	70 μg/√Hz	686 (μm/sec ²)/√Hz	[1]
Spectral Noise (10 Hz)	15 μg/√Hz	147 (μm/sec ²)/√Hz	[1]
Spectral Noise (100 Hz)	5 μg/√Hz	49 (μm/sec ²)/√Hz	[1]
Spectral Noise (1 kHz)	3 μg/√Hz	29.4 (μm/sec ²)/√Hz	[1]
Spectral Noise (10 kHz)	2 μg/√Hz	19.6 (μm/sec ²)/√Hz	[1]
Physical			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (Height x Length x Width)	0.55 in x 0.80 in x 0.55 in	14.0 mm x 20.3 mm x 14.0 mm	
Weight	0.37 oz	10.5 gm	[1]
Electrical Connector	1/4-28 4-Pin	1/4-28 4-Pin	
Electrical Connection Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	
Mounting Torque	10 to 20	113 to 225	

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

HT - High temperature, extends normal operation temperatures [3]		
Frequency Range (±5 %)	2 to 5000 Hz	2 to 5000 kHz
Frequency Range (±10 %)	1.4 to 6500 Hz	1.4 to 6500 kHz
Broadband Resolution (1 to 10000 Hz)	0.0003 g rms	0.003 μm/sec ² rms
		[1]
Temperature Range (Operating)	-65 to +325 °F	-54 to +163 °C
Excitation Voltage	23 to 30 VDC	23 to 30 VDC
Output Bias Voltage	7 to 16 VDC	7 to 16 VDC
		[2]
Discharge Time Constant	0.1 to 0.6 sec	0.1 to 0.6 sec
Spectral Noise (1 Hz)	190 μg/√Hz	1864 (μm/sec ²)/√Hz
		[1]
Spectral Noise (10 Hz)	35 μg/√Hz	345 (μm/sec ²)/√Hz
		[1]
Spectral Noise (100 Hz)	20 μg/√Hz	196 (μm/sec ²)/√Hz
		[1]
Spectral Noise (1 kHz)	3 μg/√Hz	29.4 (μm/sec ²)/√Hz
		[1]
T - TEDS Capable of Digital Memory and Communication Compliant with IEEE P1451.4		
TLA - TEDS LMS International - Free Format		
TLB - TEDS LMS International - Automotive Format		
TLC - TEDS LMS International - Aeronautical Format		
TLD - TEDS Capable of Digital Memory and Communication Compliant with IEEE 1451.4		
Temperature Range	-10 to +200 °F	-23 to +93 °C
Excitation Voltage	20 to 30 VDC	20 to 30 VDC
Output Bias Voltage	8.5 to 13 VDC	8.5 to 13 VDC


Notes

- [1] Typical.
- [2] TEDS option adds 1.0 VDC to bias voltage.
- [3] Valid from +250 to +325 °F (+121 to +163 °C), with HT option only.
- [4] Zero-based, least-squares, straight line method.
- [5] See PCB Declaration of Conformance PS023 for details.

Supplied Accessories

- 080A109 Petro Wax (1)
- 080A12 Adhesive Mounting Base (1)
- 081B05 Mounting Stud (10-32 to 10-32) (1)
- ACS-1T NIST traceable triaxial amplitude response, 10 Hz to upper 5% frequency. (1)
- M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

Entered: BLS	Engineer: BAM	Sales: WDC	Approved: JJB	Spec Number:
Date: 11/10/2006	Date: 11/10/2006	Date: 11/10/2006	Date: 11/10/2006	12854

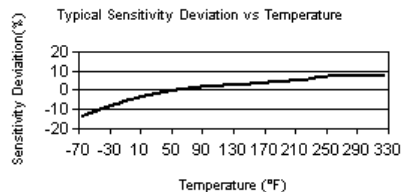

3425 Walden Avenue
 Depew, NY 14043
 UNITED STATES
 Phone: 888-684-0013
 Fax: 716-685-3886
 E-mail: vibration@pcb.com
 Web site: www.pcb.com

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.