
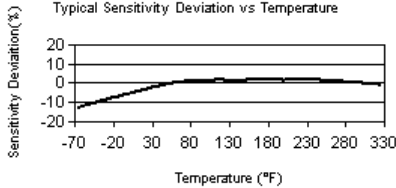


Model Number 352C34	ACCELEROMETER, ICP®		Revision J ECN #: 26069					
Performance Sensitivity (±10 %) Measurement Range Frequency Range (±5 %) Frequency Range (±10 %) Resonant Frequency Broadband Resolution (1 to 10000 Hz) Non-Linearity Transverse Sensitivity	ENGLISH 100 mV/g ±50 g pk 0.5 to 10000 Hz 0.3 to 15000 Hz ≥50 kHz 0.00015 g rms ≤1 % ≤5 %	SI 10.2 mV/(m/s ²) ±490 m/s ² pk 0.5 to 10000 Hz 0.3 to 15000 Hz ≥50 kHz 0.0015 m/s ² rms ≤1 % ≤5 %	Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.) HT - High temperature, extends normal operation temperatures Frequency Range (5 %) Frequency Range (10 %) Broadband Resolution (1 to 10000 Hz) Temperature Range (Operating) Excitation Voltage Discharge Time Constant Spectral Noise (1 Hz) Spectral Noise (10 Hz) Spectral Noise (100 Hz) Spectral Noise (1000 Hz) Output Bias Voltage Supplied Accessory: Model ACS-68 Single Axis Amplitude Response Calibration from 5 Hz to upper 5% plotted on dB scale replaces Model ACS-1					
Environmental Overload Limit (Shock) Temperature Range (Operating) Temperature Response Base Strain Sensitivity	±5000 g pk -65 to +200 °F See Graph 0.003 g/με	±49000 m/s ² pk -54 to +93 °C See Graph 0.029 (m/s ²)/με	[1] [4] [3] [1] [1]					
Electrical Excitation Voltage Constant Current Excitation Output Impedance Output Bias Voltage Discharge Time Constant Settling Time (within 10% of bias) Spectral Noise (1 Hz) Spectral Noise (10 Hz) Spectral Noise (100 Hz) Spectral Noise (1 kHz)	18 to 30 VDC 2 to 20 mA ≤200 ohm 7 to 12 VDC 1.0 to 2.5 sec <10 sec 39 μg/√Hz 11 μg/√Hz 3.4 μg/√Hz 1.4 μg/√Hz	18 to 30 VDC 2 to 20 mA ≤200 ohm 7 to 12 VDC 1.0 to 2.5 sec <10 sec 380 (μm/sec ²)/√Hz 110 (μm/sec ²)/√Hz 33 (μm/sec ²)/√Hz 14 (μm/sec ²)/√Hz	[1] [1] [1] [1] [1] [1] [1] [1] [1]					
Physical Sensing Element Sensing Geometry Housing Material Sealing Size (Hex x Height) Weight Electrical Connector Electrical Connection Position Mounting Thread Mounting Torque	Ceramic Shear Titanium Hermetic 0.44 in x 0.88 in 0.20 oz 10-32 Coaxial Jack Top 10-32 Female 10 to 20 in-lb	Ceramic Shear Titanium Hermetic 11.2 mm x 22.4 mm 5.8 gm 10-32 Coaxial Jack Top 10-32 Female 113 to 226 N-cm	[1] J - Ground Isolated Frequency Range (5 %) Frequency Range (10 %) Resonant Frequency Electrical Isolation (Base) Size (Hex x Height) Weight T - TEDS Capable of Digital Memory and Communication Compliant with IEEE P1451.4 TLA - TEDS LMS International - Free Format TLB - TEDS LMS International - Automotive Format TLC - TEDS LMS International - Aeronautical Format TLD - TEDS Capable of Digital Memory and Communication Compliant with IEEE 1451.4 Temperature Range Excitation Voltage Output Bias Voltage W - Water Resistant Cable Electrical Connector Electrical Connection Position Notes [1] Typical. [2] TEDS option adds 1.0 VDC to bias voltage. [3] 200°F to 325°F data valid with HT option only. [4] Zero-based, least-squares, straight line method. [5] See PCB Declaration of Conformance PS023 for details. Supplied Accessories 080A Adhesive Mounting Base (1) 080A109 Petro Wax (1) 081B05 Mounting Stud (10-32 to 10-32) (1) ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). () M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)					
 [5] <p>All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB group, Inc.</p>	 <p>Typical Sensitivity Deviation vs Temperature</p> <p>The graph shows Sensitivity Deviation (%) on the y-axis (ranging from -20 to 20) versus Temperature (°F) on the x-axis (ranging from -70 to 330). The curve starts at approximately -15% at -70°F, rises to 0% at 80°F, and remains near 0% through 330°F.</p>		<table border="1"> <tr> <td data-bbox="1115 1474 1310 1500">Entered: BLS</td> <td data-bbox="1310 1474 1484 1500">Engineer: JJB</td> <td data-bbox="1484 1474 1656 1500">Sales: WDC</td> <td data-bbox="1656 1474 1843 1500">Approved: BAM</td> <td data-bbox="1843 1474 2022 1500">Spec Number:</td> </tr> </table>	Entered: BLS	Engineer: JJB	Sales: WDC	Approved: BAM	Spec Number:
Entered: BLS	Engineer: JJB	Sales: WDC	Approved: BAM	Spec Number:				

Date: 03/22/2007	Date: 03/22/2007	Date: 03/22/2007	Date: 03/23/2007	13119
---------------------	---------------------	---------------------	---------------------	--------------



3425 Walden Avenue
Depew, NY 14043
UNITED STATES
Phone: 888-684-0013
Fax: 716-685-3886
E-mail: vibration@pcb.com
Web site: www.pcb.com